

ME New Equipment can also offer a wide range of conveying systems, designed to specific requirements. For more information please contact our sales staff.



Turn-type belt conveyor



Inclined plastic belt conveyors



Stainless steel mesh belt conveyor



Heavy duty roller belt conveyor



Vibratory conveyors



Horizontal plastic food grade belt conveyors



Inclined rubber belt conveyors



Roller conveyor

Conveying Equipment



Inclined Stainless Steel Screw Auger Conveyor

ME New Equipment Inclined Stainless Steel Auger Conveyor is designed for the conveying of loose free flowing products.

The conveyor is suitable for the food, chemical, pharmaceutical and general industries.



M&E Equipment Traders
4-8 Ferndell Street, South Granville NSW 2164 AUSTRALIA
Ph: 02 9725 6477 FAX: 02 9725 6166

Specifications may change at any given time without notice

ME New Equipment is a division of M&E Equipment Traders Pty Ltd **equipment & traders**

www.equipmenttraders.com.au

ME New Equipment is a division of M&E Equipment Traders Pty Ltd **equipment & traders**


Applications

Suitable for distributing powder & granular products into packaging and blending equipment. Some examples of products conveyed are:

- Milk powder
- Sugar
- Coffee beans
- Coffee grounds
- Chemical powders
- Dextrose
- Food additives
- Seasonings

Technical specifications

Model	CSI-114-2700	CSI-168-2500
Lift capacity	3-5 m ³ /hr	8-10 m ³ /hr
Hopper volume	230Lt	230Lt
Conveyor height (H)	2700mm	2500mm
A	970mm	970mm
B	910mm	910mm
Screw diameter (D)	114mm	168mm
Motor	Auger 2.2Kw, vibrating 70 Watts	Auger 3.0Kw, vibrating 70 Watts
Voltage	415V / 50Hz, 3 phase	415V / 50Hz, 3 phase
Machine weight	165Kg	200Kg

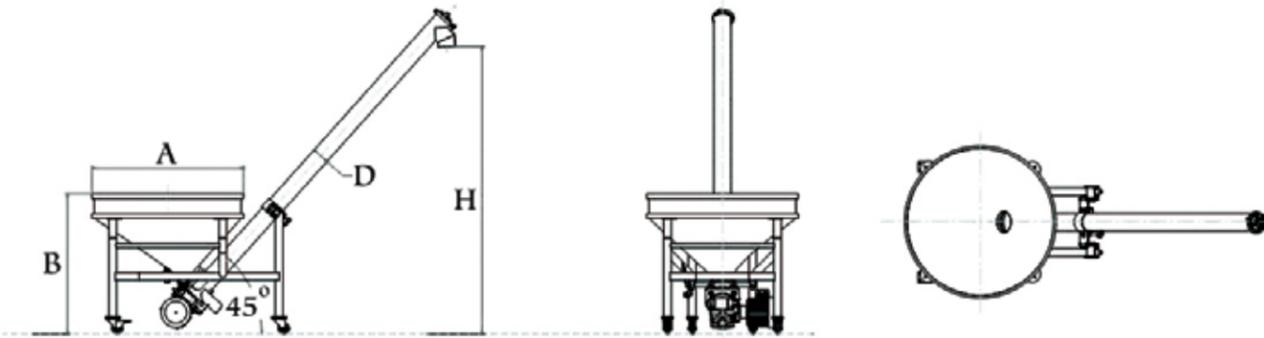

Stainless Steel Flat Belt Conveyors

ME New Equipment offers a range of stainless food grade flat belt conveyors suitable for most applications.



Dimensions & specifications

Model	Dimensions (mm)	Motor/Voltage	Safe Working load/mtr
CBF 400 x 3000	400 (W) x 3000 (L) x 500-900 (H)	0.25Kw/415Volt	30Kg/mtr
CBF 400 x 6000	400 (W) x 6000 (L) x 500-900 (H)	0.55Kw/415Volt	30Kg/mtr
CBF 600 x 3000	600 (W) x 3000 (L) x 500-900 (H)	0.55Kw/415Volt	30Kg/mtr
CBF 600 x 6000	600 (W) x 6000 (L) x 500-900 (H)	0.75Kw/415Volt	30Kg/mtr

Features

Constructed from polished 304 grade stainless steel

Easy dismantling for cleaning requiring no tools

Stainless steel hopper fitted with electric vibratory motor to eliminate product from bridging

Stainless steel safety net

Stainless steel hinged dust cover

Unit is mobile, mounted on lockable casters



Stainless steel safety net

Features

Conveyor constructed from 304 grade stainless steel

Adjustable stainless steel legs

White PVC 2mm thick food grade belt

Adjustable guide rails

Stainless steel end rollers with food grade bearings

Optional features

- Auger trolley for lowering and removing flight for easy cleaning
- Blender agitator for anti-bridging
- Customised augers built to clients requirements



Auger trolley

Optional features

- Electronic variable speed drive
- Electrical DOL starter and power lead